



# PRODUCT CATALOUGE



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# INTRODUCTION



**BLSX LTD is built on a simple belief: engineering should stand the test of time.**

As an organisation certified to ISO 9001:2015 (Quality Management), ISO 14001:2015 (Environmental Management), and ISO 45001:2018 (Occupational Health & Safety), with CE marking and RDSO approval, we bring precision, responsibility, and engineering excellence to every solution we deliver.

We specialise in high-performance industrial hoses for demanding applications across dredging, steel, slurry, and heavy-duty industrial environments, along with engineered rubber-to-metal components designed for critical heavy machinery. Every product is developed with a focus on reliability, durability, safety, and long-term performance.

Building on our expertise in engineered products, BLSX has expanded into bridge and flyover rehabilitation and construction, delivering critical infrastructure solutions across Asia and the Middle East. Our capabilities include bridge bearings, expansion joints, and specialised support systems, enabling us to contribute to safer, stronger, and more connected infrastructure.

Our strength is driven by experienced people, advanced manufacturing capabilities, and a 1,50,000 sq. ft. facility in Hyderabad, supported by integrated testing laboratories and specialised machinery. With global partnerships and an established presence in India and the UK, BLSX continues to develop engineering solutions that create trust, performance, and lasting value.

**BLSX LTD Engineering Reliability. Building Tomorrow.**



# THE MIND BEHIND BLSX

“

BLSX was built on a simple but uncompromising belief that safety, engineering discipline, and execution integrity must never be negotiated.

Over the past three decades, we have learned that growth does not come from chasing opportunities, but from building capabilities, earning trust, and standing accountable for what we deliver.

Every product that leaves our facility carries our responsibility to perform reliably, and to stand the test of time.

As we move into the future, our focus remains clear: build safely, engineer responsibly, and grow sustainably.”

”



**Mr. UNMESH TRIVEDI**  
*Managing Director*



#### **SAFETY FIRST**

We built with  
safety at the core



#### **ENGINEERED RESPONSIBLY**

Engineering excellence  
in every solution



#### **EARN TRUST**

Trust earned through  
transparency and  
performance.



#### **GROW SUSTAINABLY**

Sustainable growth  
for a better tomorrow.



# OUR VISION



## Our Vision

At BLSX, we aspire to be a name defined by trust, exceptional quality and engineering that leads with innovation and foresight. Our vision is to serve as a true partner in our customers' growth, bringing solutions that strengthen performance, reliability and long-term value across diverse industries. We believe progress is meaningful only when it is shared, which is why we strive to elevate standards, create lasting impact and build opportunities that support people, industries and communities around the world.

## Our Mission

BLSX LTD is founded on a timeless belief that engineering should not only solve today's challenges but also shape a better tomorrow.

Guided by our **ISO 9001:2015, ISO 45001:2018, ISO 14001:2015, CE, and RDSO** accreditations, we pursue innovation with integrity, crafting products that embody precision, resilience, and a vision for lasting progress.


## Our Values

**Innovation:** We think beyond limits and constantly explore better ways to solve challenges and create impact.

**Excellence:** We strive for superior quality in everything we do, ensuring reliability, precision, and high performance.

**Integrity:** We act with honesty and transparency, building trust through ethical decisions and responsible practices.

**Continual Improvement:** We strive to grow every day, refining our processes, strengthening our capabilities and setting higher standards.

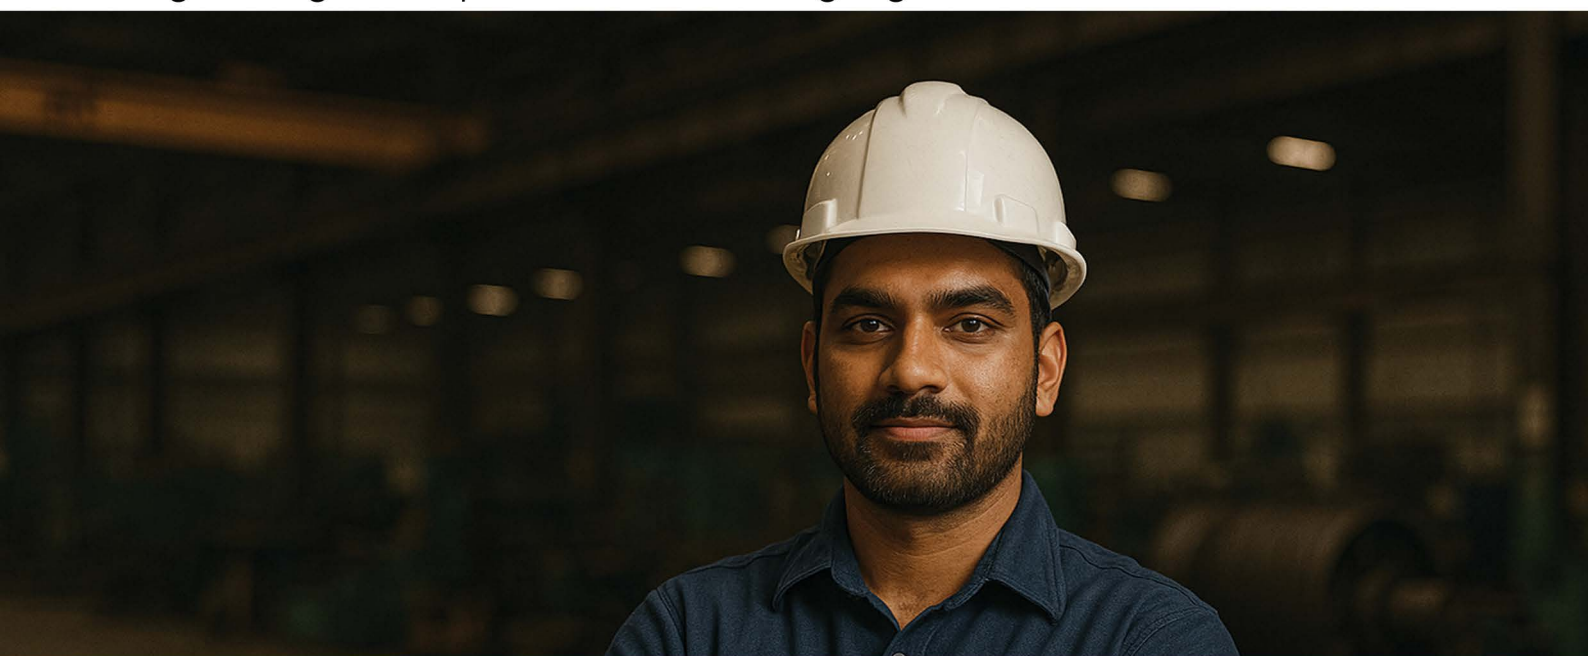



# INFRASTRUCTURE FACILITIES



BLSX LTD is proud to announce the acquisition of a fully automated production line for large-diameter hoses. This strategic investment underscores our unwavering commitment to operational efficiency and the highest standards of product quality.

## Our robust manufacturing infrastructure includes:

**Hose Production:** One fully automated line, three semi-automated lines, and four specialised large-diameter dredge production lines, yielding an annual capacity of 1,000 to 1,500 units.



## In-House Compounding:

Our dedicated mixing unit delivers 8 tons of rubber compound daily, powered by two kneader mixers, three open mixing mills, and a precision cooling-equipped calendar system.

## Precision Preparation:

We utilise automated fabric and rubber cutting technology to ensure exact specifications for every component.



## Vertical Integration:

To ensure total quality control, we fabricate all hose fittings in-house. Our machining facility is fully equipped with plasma cutting, drilling machines, sheet/rod rolling, and



# CLIENTELE



adani

*Flexiflo*  
The Hose & Fitting Specialists

JSW

 **KSR**  
GROWTH UNLIMITED

 **meil**

**MEKA**  
HEAVY ENGINEERING

NAVAYUGA 

 **MDC**  
GROUP

 **VISHWA SAMUDRA**  
CHALLENGE IT. CHANGE IT.

 **DOLPHIN ENERGY**  
دولفين للطاقة

**ilcon**

**propel**   
Engineering Excellence

**FLSMIDTH**

 **REACH DREDGING LTD.**

 **HAIL STONE**

 **AMBIKA**  
Dredging Limited

 **DEME**

 **CAPITAL GAS**  
Gambia Limited

 **CUMI**

 **THRIVANI**

  
Dredging Corporation  
of India Limited

 **LLOYDS METALS**



# MARINEX DREDGE SUCTION HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Dredging Services & Land Reclamation
- Maritime Services



## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C  
(-13°F to +176°F)



# MARINEX DREDGE SUCTION HOSE



| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |
| 42        | 1050 | 10-40            | 30-120            | Upto 11.8 meters  |

# MARINEX DREDGE SUCTION & DISCHARGE HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover


EPDM Rubber

### Working Temperature

-25°C to +80°C  
(-13°F to +176°F)

## AREA OF USE

- Dredging Services & Land Reclamation
- Maritime Services

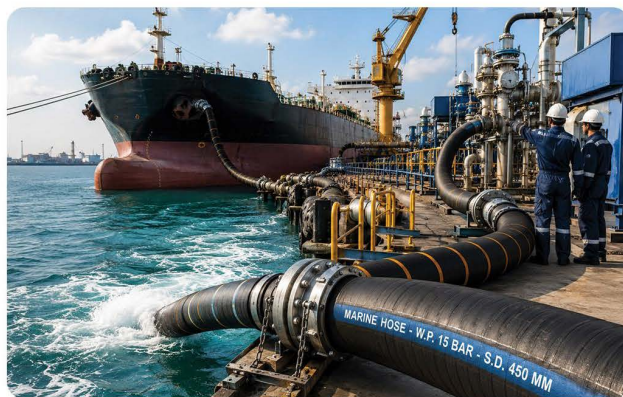



# MARINEX

## DREDGE SUCTION & DISCHARGE HOSE



| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |
| 42        | 1050 | 10-40            | 30-120            | Upto 11.8 meters  |

# MARINEX DREDGE DISCHARGE HOSE




## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Dredging Services & Land Reclamation
- Maritime Services

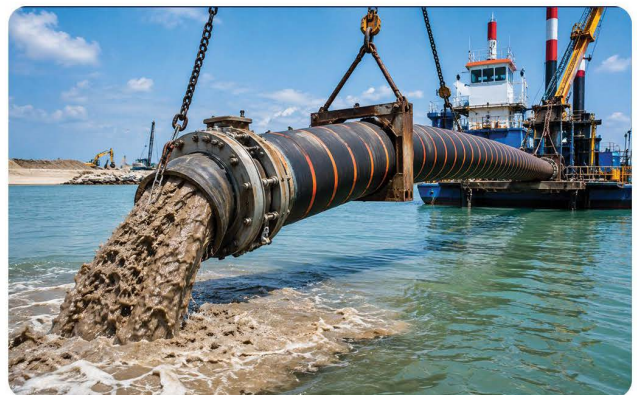

## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C  
(-13°F to +176°F)



# MARINEX DREDGE DISCHARGE HOSE



| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |
| 42        | 1050 | 10-40            | 30-120            | Upto 11.8 meters  |

# MARINEX ARMORED HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Steel Rings Reinforced Armor

## AREA OF USE

- Dredging coral bed & Land  
Reclamation Maritime Services



## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature


-25°C to +80°C  
(-13°F to +176°F)





| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |

# MARINEX ARMORED SELF FLOATING HOSE

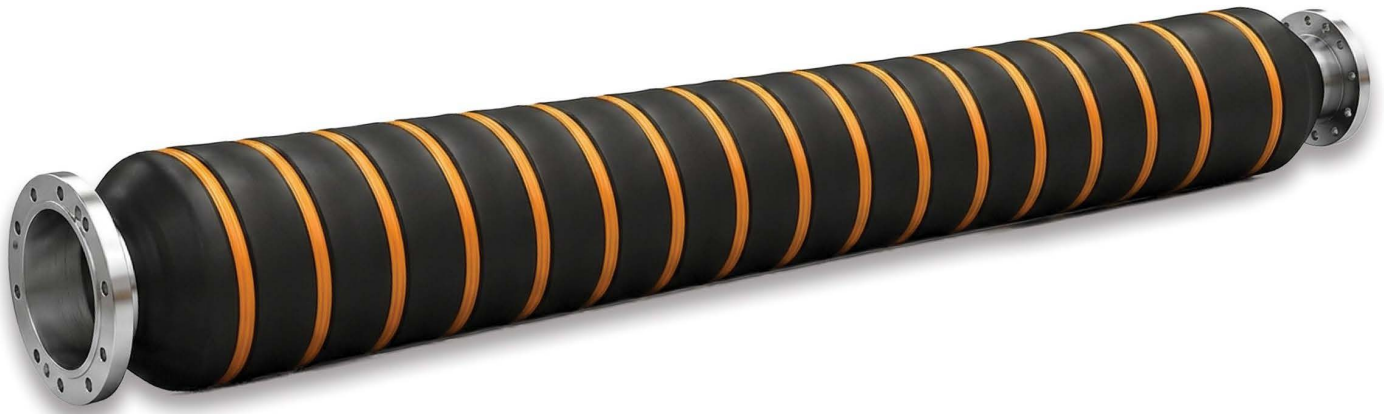


## PRODUCT FEATURES

-  Steel Rings Reinforced Armor  
Hose Inner Dia 300mm to 1200mm
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Port & Dock Construction & Land  
Reclamation Harbour & Port Maintenance

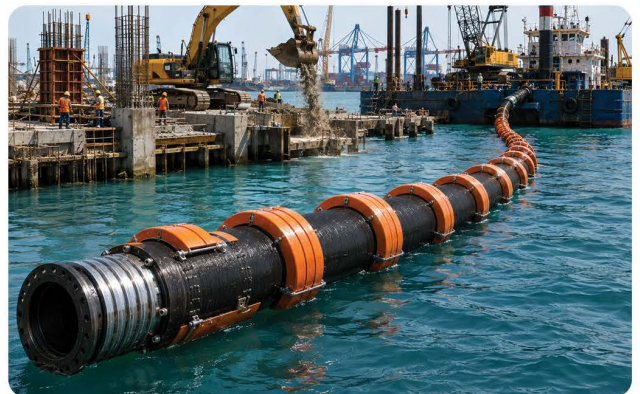

## CONSTRUCTION

### Inner Lining

High-grade,  
abrasion-resistant rubber

### Reinforcement

High-strength spiral steel wire  
Multiple layers of high-tensile  
polyester/nylon tyre

### Buoyancy Layer

Premium integrated  
closed-cell PE foam


### Outer Cover

UV, ozone, and abrasion-  
resistant synthetic rubber



# MARINEX

## ARMORED SELF FLOATING HOSE

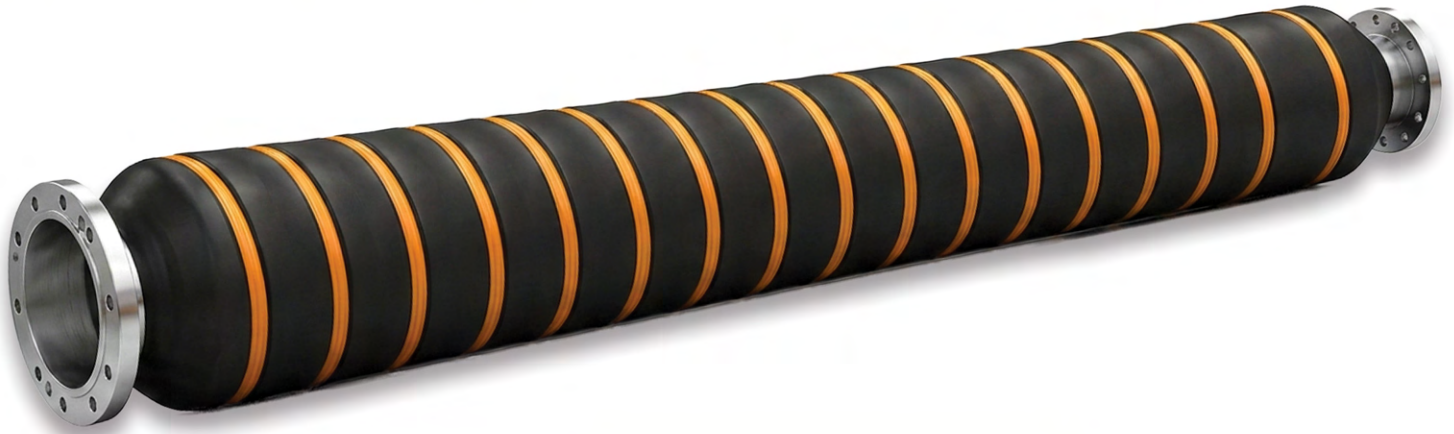

| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |

# MARINEX SELF FLOATING HOSE




## PRODUCT FEATURES

-  Steel Rings Reinforced Armor  
Hose Inner Dia 300mm to 1200mm
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Port & Dock Construction & Land  
Reclamation Harbour & Port Maintenance

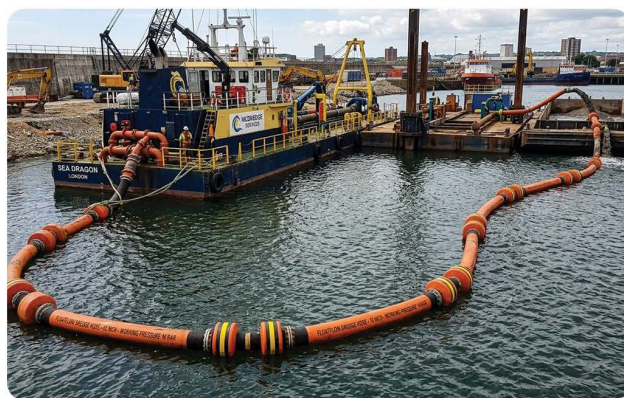

## CONSTRUCTION

### Inner Lining

High-grade,  
abrasion-resistant rubber

### Reinforcement

High-strength spiral steel wire  
Multiple layers of high-tensile  
polyester/nylon tyre

### Buoyancy Layer

Premium integrated  
closed-cell PE foam

### Outer Cover

UV, ozone, and abrasion-  
resistant synthetic rubber



# MARINEX SELF FLOATING HOSE



| HOSE I.D. |      | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|------|------------------|-------------------|-------------------|
| Inch      | NB   | Bar              | Bar               | Mtr               |
| 12        | 300  | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350  | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400  | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450  | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500  | 10-40            | 30-120            | Upto 11.8 meters  |
| 22        | 550  | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600  | 10-40            | 30-120            | Upto 11.8 meters  |
| 26        | 650  | 10-40            | 30-120            | Upto 11.8 meters  |
| 28        | 700  | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750  | 10-40            | 30-120            | Upto 11.8 meters  |
| 32        | 800  | 10-40            | 30-120            | Upto 11.8 meters  |
| 34        | 850  | 10-40            | 30-120            | Upto 11.8 meters  |
| 36        | 900  | 10-40            | 30-120            | Upto 11.8 meters  |
| 38        | 950  | 10-40            | 30-120            | Upto 11.8 meters  |
| 40        | 1000 | 10-40            | 30-120            | Upto 11.8 meters  |




## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Suitable for water transfer applications (Brine, Sea water, hard water etc)
- Floating and Submersed Transfer Lines, Water Treatment Plants

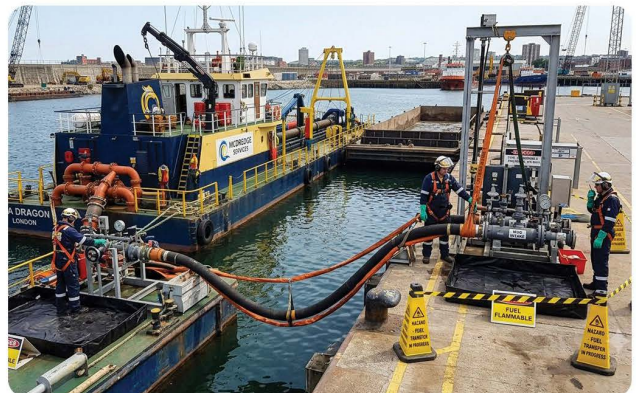

## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend

### Reinforcement

High Tensile  
Steellayer Reinforcement

### Cover

NBR &  
EPDM Rubber

### Working Temperature

-50°C/- 58°F to 110°C/230°F





| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  High Pressure Capability
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Trailing Suction Hopper Dredgers (TSHD)
- Port & Harbour Maintenance Dredging
- Channel Deepening & Land Reclamation Projects
- Marine Construction, River & Waterway Maintenance Operations



## CONSTRUCTION

**Inner Wear Layer**  
Black wear and corrosion-resistant mixing rubber

**Reinforcement**  
High Tensile Textile Reinforcement

**Outer Cover**  
Black, weather and abrasion-resistant rubber

**Flange**  
Steel Flange





| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE




QUALITY



COMMITMENT

# MARINEX DOOR SEAL

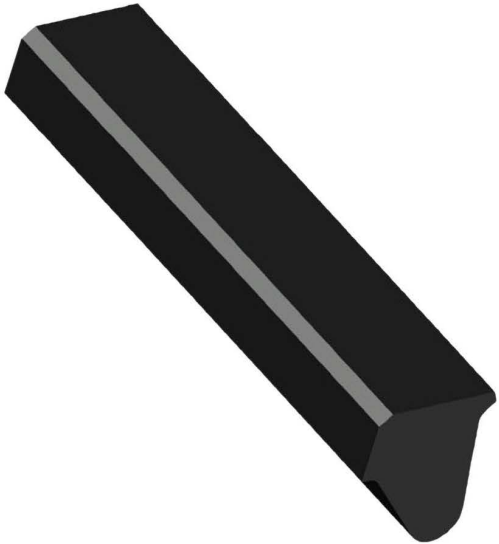

## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  High Pressure Capability
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

Seals are mounted on the steel frames of discharge doors at the base of the hopper. They must withstand the weight of thousands of tons of material while preventing leaks. These seals prevent the dredged material (sand, silt, or gravel) from leaking



## CONSTRUCTION

Continuous molded rubber profile with high compression rubber to withstand constant abrasion and sea water damage.



# APEXPRO DOCK OIL TRANSFER HOSE




## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Ship to shore Fuel transfer
- LPG & Crude Oil Transfer
- Crude Oil Refineries

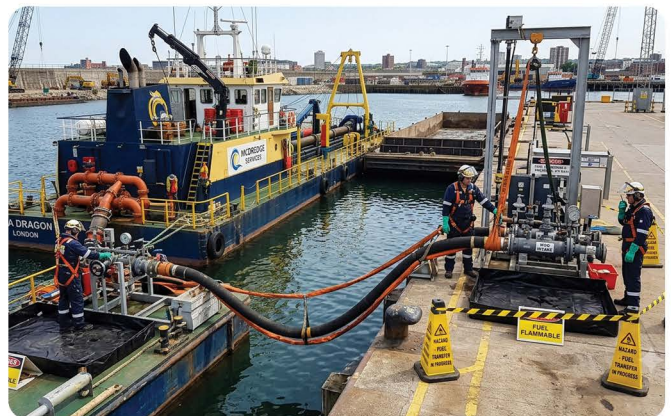

## CONSTRUCTION

**Tube**  
Synthetic and Natural  
Rubber Blend

**Reinforcement**  
High Strength Helix  
Steel & Cord Reinforcement

**Cover**  
NBR &  
EPDM Rubber

**Working Temperature**  
-50°C to +120°C  
(-58°F to +250°F)

# APEXPRO

## DOCK OIL TRANSFER HOSE



| HOSE I.D. |     | WORKING<br>PRESSURE | BURSTING<br>PRESSURE | CUSTOMIZED<br>LENGTH |
|-----------|-----|---------------------|----------------------|----------------------|
| Inch      | NB  | Bar                 | Bar                  | Mtr                  |
| 04        | 100 | 10-40               | 30-120               | Upto 20 meters       |
| 06        | 150 | 10-40               | 30-120               | Upto 20 meters       |
| 08        | 200 | 10-40               | 30-120               | Upto 20 meters       |
| 10        | 250 | 10-40               | 30-120               | Upto 11.8 meters     |
| 12        | 300 | 10-40               | 30-120               | Upto 11.8 meters     |
| 14        | 350 | 10-40               | 30-120               | Upto 11.8 meters     |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO

## OIL SUCTION & DISCHARGE HOSE




### PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  5 bar to 20 bar Working Pressure
-  Ozone Resistant Cover
-  Kink Resistant & Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Steel Rings Reinforced Armor

### AREA OF USE

- Petrochemical Industries, Automotive Industry
- Manufacturing Plants for fuel transfer,
- Mining and Steel Industry

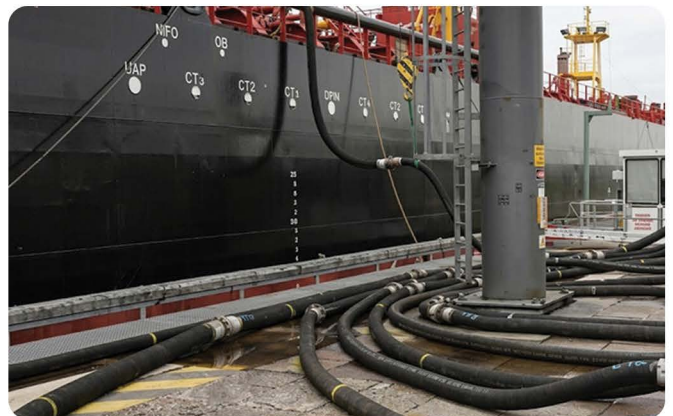

### CONSTRUCTION

**Tube**  
NBR Rubber

**Reinforcement**  
High Strength  
Cord Reinforcement

**Cover**  
NBR Rubber

**Working Temperature**  
-50°C to +120°C  
(-50°F to +250°F)

# APEXPRO

## OIL SUCTION & DISCHARGE HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 4         | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 5         | 125 | 10-40            | 30-120            | Upto 20 meters    |
| 6         | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 8         | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 150 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 200 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO

## UHMWPE OIL S&D

### HOSE



## PRODUCT FEATURES

-  Ultra High Molecular Weight Polyethylene liner
-  Low Temperature Resistant
-  Ozone Resistant Cover
-  Chemical & Oil resistant
-  Weather, UV & Sea Water Resistant
-  Low coefficient of friction

## CONSTRUCTION

### Tube

Ultra High Molecular Weight polyethylene (UHMWPE)

### Reinforcement

High Tensile Cord Reinforcement, Built in fittings as per Customer Requirement.

### Cover


UHMWPE

### Working Temperature

-190°C to 130°


## AREA OF USE

- Transfer of high Abrasive Media, Mining & Slurry Transportation
- Oil Transfer Pipelines & Cryogenic Applications

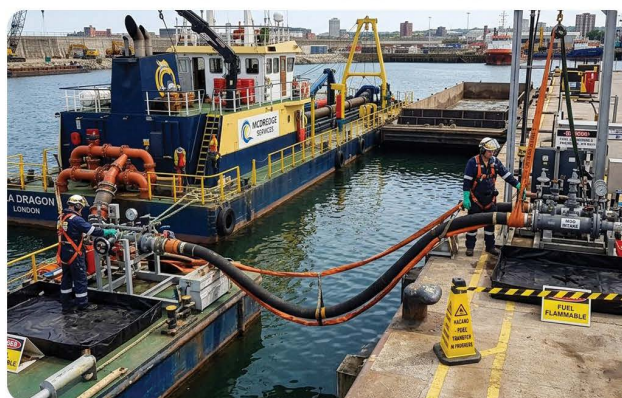

# APEXPRO

## UHMWPE OIL S&D HOSE

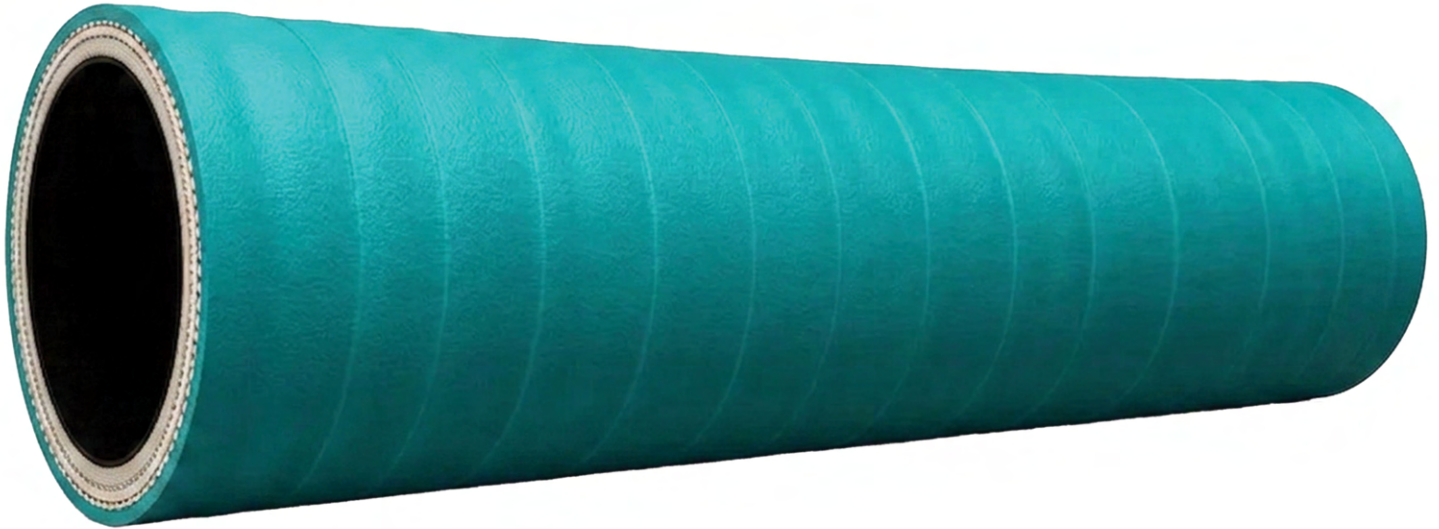

| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO UHMWPE MINING HOSE




## PRODUCT FEATURES

-  Ultra High Strength Cord Reinforcement
-  10 bar to 50 bar Suction working pressure
-  Ozone Resistant Cover
-  High Impact, Corrosion Resistant
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Underground/Open Cast Mine
- Landfills/Reclamation
- Iron & Steel Industries

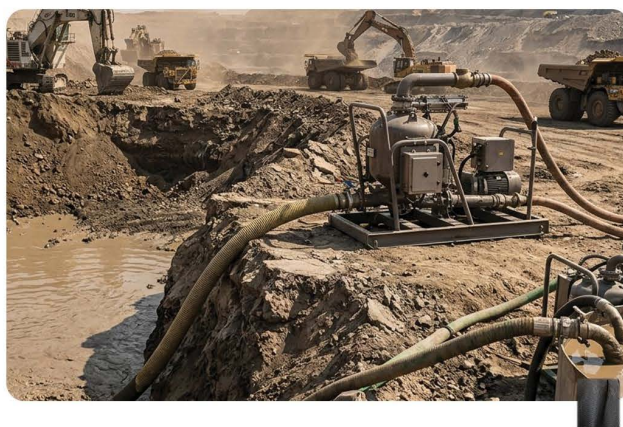

## CONSTRUCTION

**Tube**  
UHMWPE liner

**Reinforcement**  
High Tensile Q235  
Steel layer Reinforcement

**Cover**  
EPDM Rubber

**Working Temperature**  
-50°C/- 58°F to 110°C/230°F

# APEXPRO UHMWPE MINING HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO TRENCH MINING HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Vacuum Working Pressure
-  Ozone Resistant Cover
-  Abrasion Resistant
-  Weather, UV & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Vacuum pumps for slurry transfer in underground/open-cast mines.
- Iron & Steel Industries.



## CONSTRUCTION

### Tube

Synthetic and Natural  
Rubber Blend liner

### Reinforcement

Built in Double  
Helical SS wire construction  
/ E250 steel rings

### Cover

EPDM Rubber

### Working Temperature

-25°C to +70°C  
(-13°F to +158°F)

# APEXPRO TRENCH MINING HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO TRENCH ARMORED HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  10 bar to 50 bar Suction working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Underground/Open Cast Mine
- Landfills/Reclamation
- Iron & Steel Industries



## CONSTRUCTION

**Tube**  
PU liner

**Reinforcement**  
High Tensile Q235  
Steel layer Reinforcement

**Cover**  
EPDM Rubber

**Working Temperature**  
-50°C/- 58°F to 110°C/230°F

# APEXPRO TRENCH ARMORED HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO SLURRY SUCTION & DISCHARGE HOSE




## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  Reinforcement 5 bar to 40 bar working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Underground/Open Cast Mine
- Original Equipment Manufacturers.
- Iron & Steel Industries

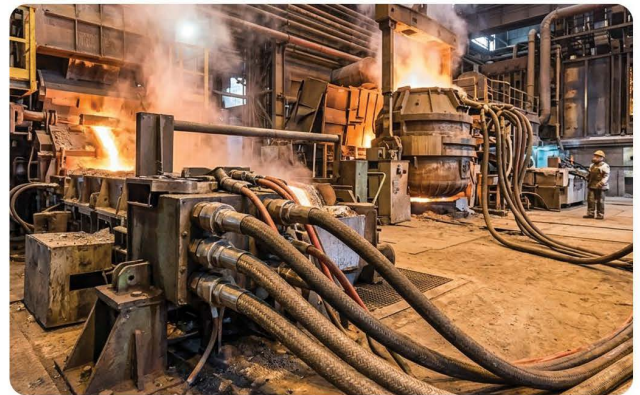

## CONSTRUCTION

### Tube

Synthetic and  
Natural Rubber Blend

### Reinforcement

High Strength Helix Steel  
& Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)

# APEXPRO SLURRY SUCTION & DISCHARGE HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 450 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE




QUALITY



COMMITMENT



# APEXPRO CERAMIC HOSE

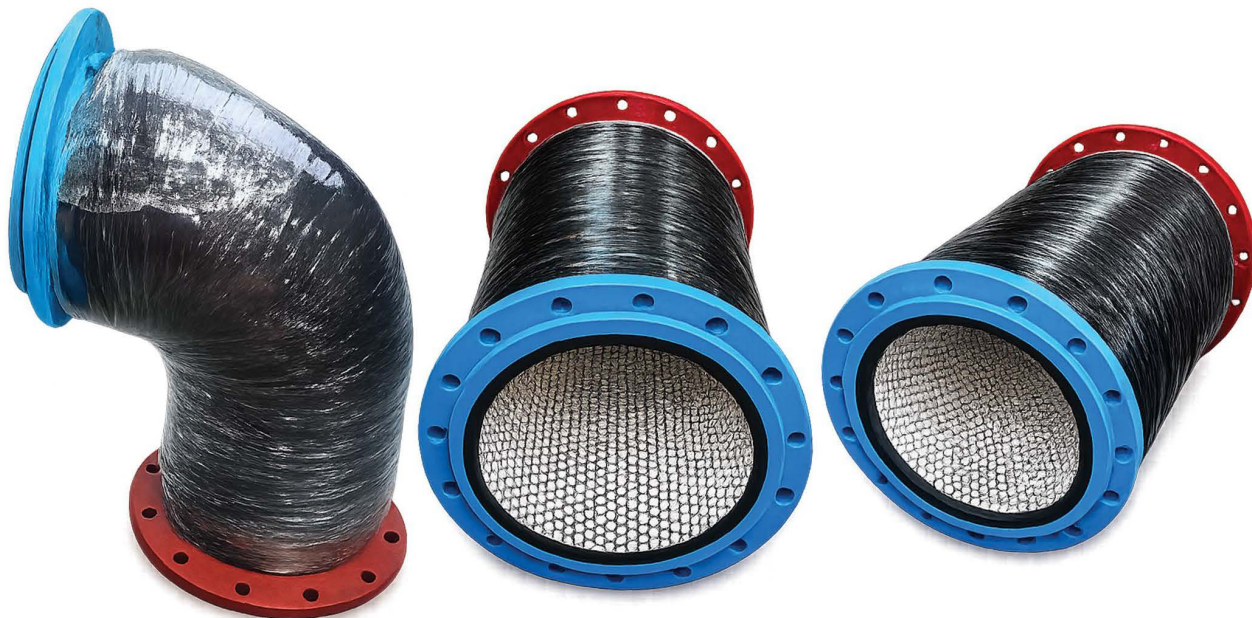

## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  5 bar to 20 bar working pressure
-  Ozone Resistant Cover
-  Impact, Corrosion Resistant
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Thermal Power Plants, Cement Plants,
- Ore Dressing plants, Coal & Steel Plants, Mining Industries
- High abrasive particle transfers etc.



## CONSTRUCTION

### Tube

Synthetic and Natural Rubber Blend

### Reinforcement

High Strength Helix Steel & Cord Reinforcement

### Cover


EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)



# APEXPRO CERAMIC HOSE

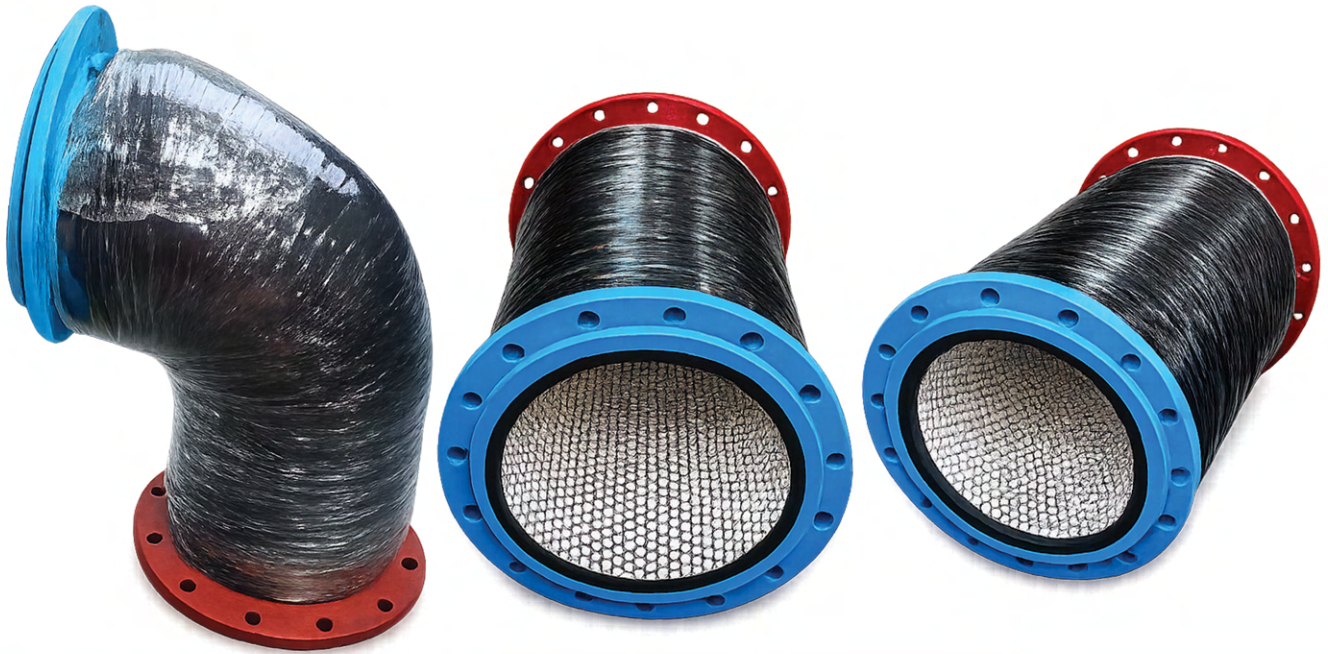

| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 1.5       | 38  | 10-40            | 30-120            | Upto 20 meters    |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 500 | 10-40            | 30-120            | Upto 11.8 meters  |
| 24        | 600 | 10-40            | 30-120            | Upto 11.8 meters  |
| 30        | 750 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE




QUALITY



COMMITMENT



# APEXPRO CERAMIC PADS

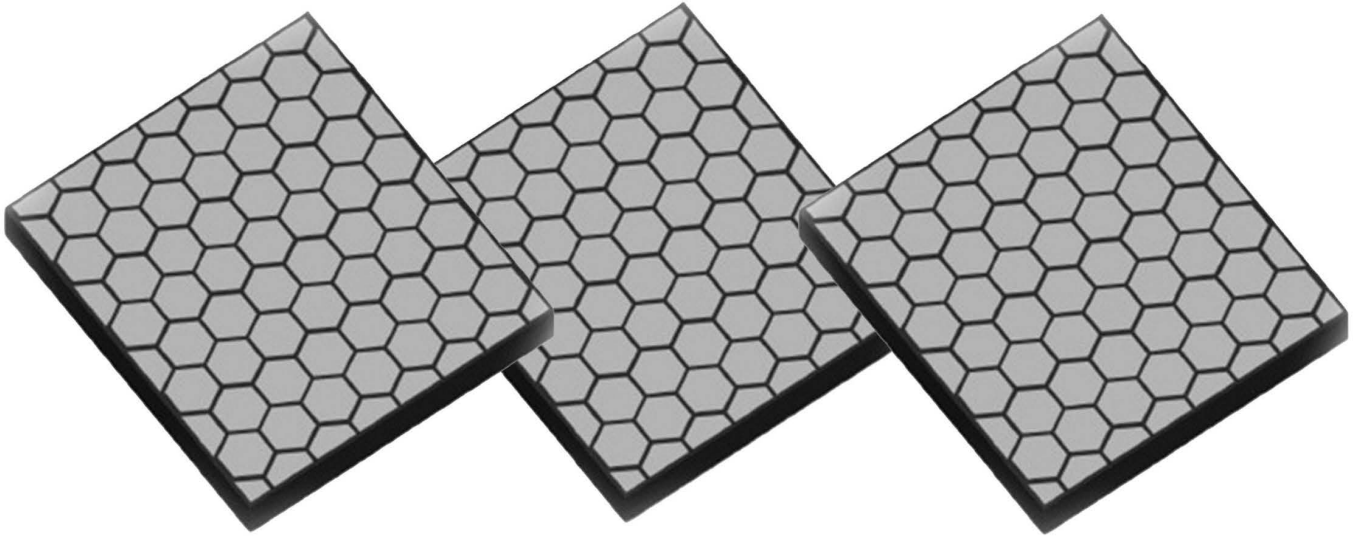


## PRODUCT FEATURES

-  Wear Resistant Ceramic layer
-  Customized Sizes
-  Ozone Resistant Cover
-  Impact Resistance
-  Weather, UV, Chemical Corrosion & Radio Activity Resistant
-  Flange as per Customer Requirement

## AREA OF USE


- Conveyor Systems, chutes, feeders of Ore Dressing
- plants, Coal & Steel Plants, Mining Industries
- High abrasive particle transfers.
- Ball Mill Liners, Hoppers etc.

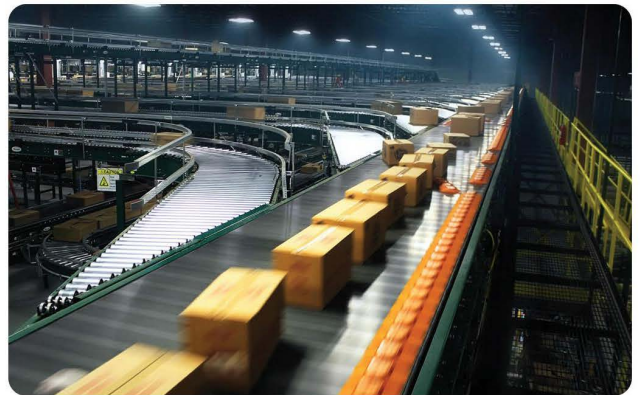

## CONSTRUCTION

- Ceramic Honeycomb Layer bonded with blend of synthetic and natural rubber
- High tensile rubber layer
- Bottom CN layer for bonding

# APEXPRO CERAMIC PADS

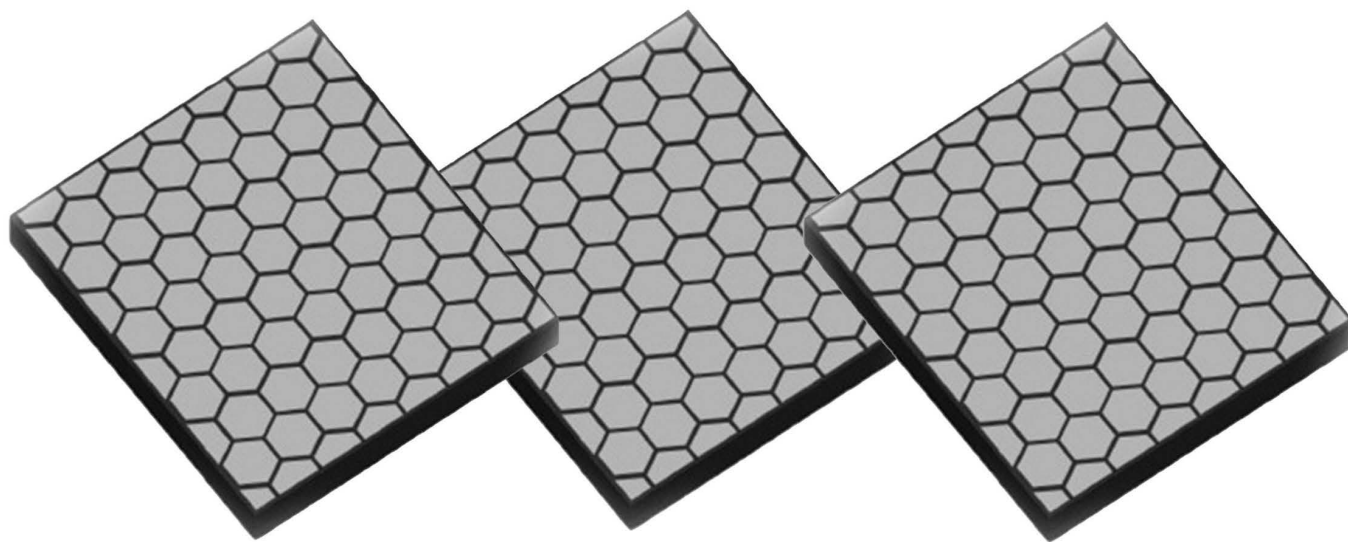

| S.NO | SIZE      | CERAMIC THICKNESS | RUBBER THICKNESS | PAD THICKNESS |
|------|-----------|-------------------|------------------|---------------|
| 01   | 150 × 150 | 08                | 17               | 25            |
| 02   | 200 × 150 | 08                | 15               | 25            |
| 03   | 250 × 150 | 10                | 20               | 30            |
| 04   | 300 × 150 | 13                | 22               | 35            |
| 05   | 350 × 150 | 13                | 22               | 35            |
| 06   | 400 × 150 | 20                | 25               | 40            |
| 07   | 500 × 150 | 20                | 25               | 40            |



RELIABILITY



PERFORMANCE




QUALITY



COMMITMENT



# APEXPRO CARBON FREE HOSE

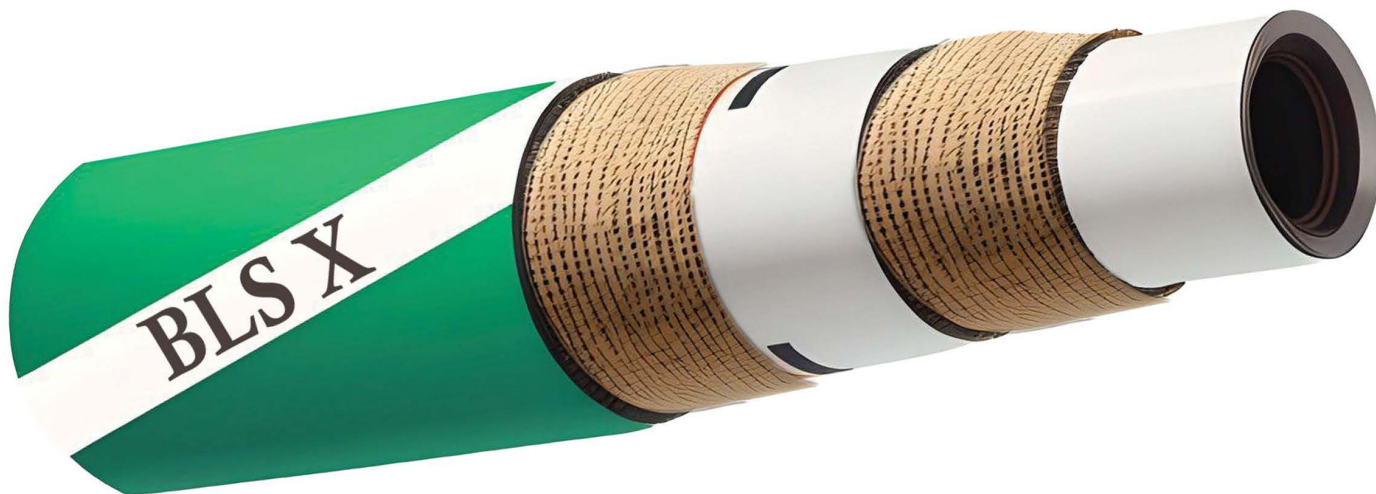

## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  5 bar to 30 bar working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Glass Fibre Cover

## AREA OF USE

- Water Transfer at near Furnace Coolant
- Applications in Steel Industries, Casting industries and
- Glass industries



## CONSTRUCTION


**Tube**  
PU liner

**Reinforcement**  
High Tensile Q235  
Steel layer Reinforcement

**Cover**  
EPDM Rubber

**Working Temperature**  
-50°C/- 58°F to 110°C/230°F

# APEXPRO CARBON FREE HOSE

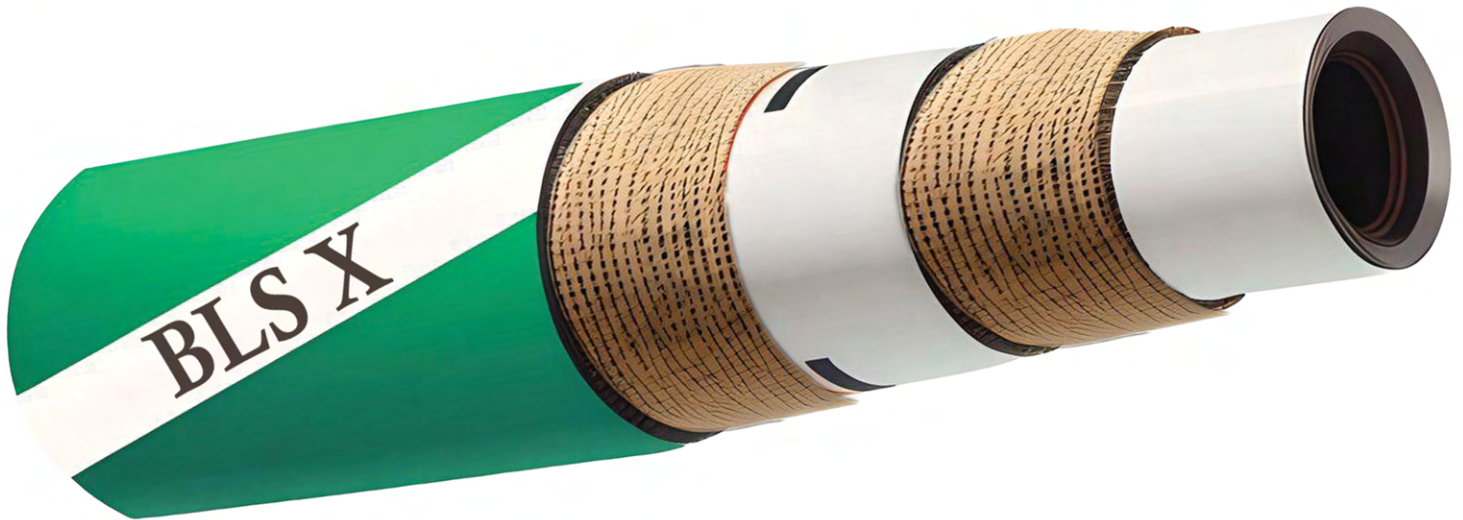

| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 2         | 51  | 10-40            | 30-120            | Upto 20 meters    |
| 3         | 75  | 10-40            | 30-120            | Upto 20 meters    |
| 4         | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 5         | 125 | 10-40            | 30-120            | Upto 20 meters    |
| 6         | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 8         | 200 | 10-40            | 30-120            | Upto 20 meters    |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO CEMENT BULKER HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  10 bar working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Plaster mortar, Cement mortar or Gypsum transfer.
- Cement & Bulker



## CONSTRUCTION

### Tube

Synthetic and Natural Rubber Blend

### Reinforcement

High Tensile Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)

# APEXPRO CEMENT BULKER HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 02        | 50  | 10-40            | 30-120            | Upto 20 meters    |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO BULK MATERIAL HOSE



## PRODUCT FEATURES

-  High Strength Cord Reinforcement
-  5 bar to 30 bar working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- RMC air pump rubber hose, RMC plants
- Batching plants & Sand washing plants



## CONSTRUCTION

### Tube

Synthetic and  
Natural Rubber Blend

### Reinforcement

High Tensile  
Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)

# APEXPRO BULK MATERIAL HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 02        | 50  | 10-40            | 30-120            | Upto 20 meters    |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO

## 3D\5D BEND HOSE



### PRODUCT FEATURES

-  Long-Lasting Heavy-Duty Construction Superior
-  10 bar working pressure
-  Ozone Resistant Cover
-  Resistant to crack formation, Creep, impact and Abrasion
-  Weather, UV, Chemical Corrosion, Radio Activity & Low flow resistance
-  Flange as per Customer Requirement

### AREA OF USE

- Dredging, Steel Plants, Coal
- Refinement Plants, Power Plants & OEM's



### CONSTRUCTION

#### Tube

Synthetic and Natural Rubber Blend

#### Reinforcement

High Tensile Cord Reinforcement

#### Cover

EPDM Rubber

#### Working Temperature

-30°C to +70°C (-20°F to +158°F)

### DESIGN & PERFORMANCE

- Manufactured out of rubber with cord reinforcement and a galvanized steel wire spiral.
- Designed for tight spaces where ordinary hoses can't bend sufficiently.
- custom sizes and bend angles can be made according to needs.
- Outer bend has >30% thicker wear tube than inner bend for better weareconomy.
- Bend range: 60°-110°. Thick rubber wall increases life of hose and provideslow flow resistance.
- Test pressure: 1.5 times working pressure; peak pressure against bursting: 4.0 times working pressure.

# APEXPRO

## 3D\5D BEND HOSE



| Hose I.D. |     | Working Pressure | Bursting Pressure | Length    | Radius | Sleeve |
|-----------|-----|------------------|-------------------|-----------|--------|--------|
| Inch      | NB  | Bar              | Bar               | AXB       | R      | C      |
| 4         | 100 | 10               | 10-30             | 455X455   | 305    | 150    |
| 6         | 152 | 10               | 10-30             | 670X670   | 455    | 215    |
| 8         | 203 | 10               | 10-30             | 840X840   | 615    | 225    |
| 10        | 254 | 10               | 10-30             | 1015X1015 | 765    | 250    |
| 12        | 305 | 10               | 10-30             | 1170X1170 | 915    | 255    |
| 14        | 355 | 10               | 10-30             | 1360X1360 | 1065   | 295    |
| 16        | 405 | 10               | 10-30             | 1565X1564 | 1215   | 350    |
| 18        | 455 | 10               | 10-30             | 1770X1770 | 1370   | 400    |
| 22        | 550 | 10               | 10-30             | 2100X2100 | 1650   | 450    |
| 26        | 660 | 10               | 10-30             | 2455X2455 | 1980   | 475    |
| 30        | 750 | 10               | 10-30             | 2700X2700 | 2250   | 450    |
| 36        | 910 | 10               | 10-30             | 3230X3230 | 2730   | 500    |



# APEXPRO POTABLE WATER HOSE



## PRODUCT FEATURES

-  FDA Approved
-  5 bar to 30 bar working pressure
-  Ozone Resistant Cover
-  Impact Resistance
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Used for transfer of drinking water in water treatment plants



## CONSTRUCTION

### Tube

Synthetic and  
Natural Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover


EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)

# APEXPRO

## POTABLE WATER HOSE

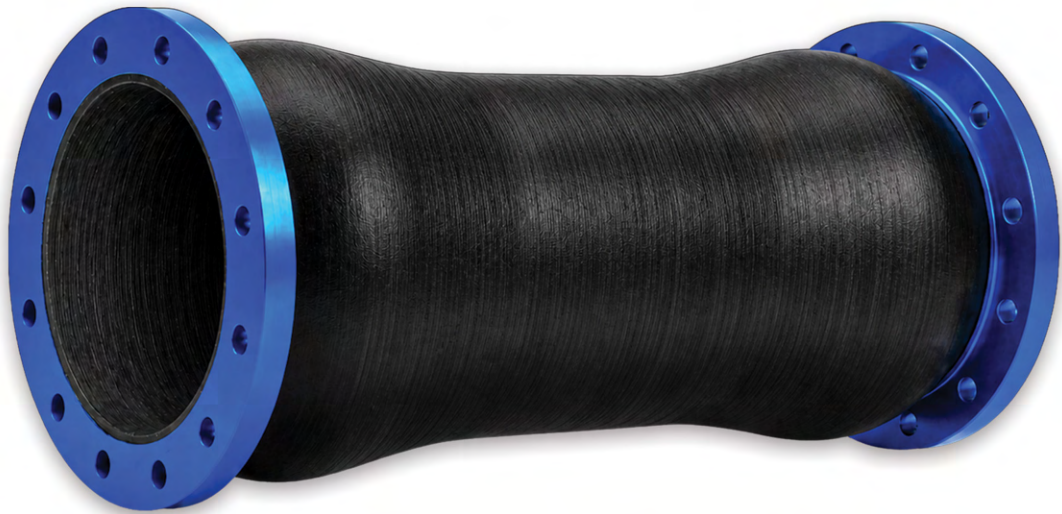

| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 18        | 500 | 10-40            | 30-120            | Upto 11.8 meters  |
| 20        | 600 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT



# APEXPRO WATER SUCTION & DICHARGE HOSE



## PRODUCT FEATURES

-  FDA Approved
-  5 bar to 30 bar working pressure
-  Ozone Resistant Cover
-  Impact Resistance
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Dewatering of Mines
- Water transfer in Industries
- Desalination Plants



## CONSTRUCTION

### Tube

Synthetic and  
Natural Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)

# APEXPRO

## WATER SUCTION & DISCHARGE HOSE



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT





## PRODUCT FEATURES

-  FDA Approved, Completely Hygienic & Non-Toxic
-  High temperature resistance upto 130 degrees
-  Ozone Resistant Cover
-  Oil & Chemical Resistant
-  Weather, UV, Chemical Corrosion, Radio Activity & Sea Water Resistant
-  Flange as per Customer Requirement

## AREA OF USE

- Food Processing Industries for  
Transfer of Liquids such as Oils, Water etc..



## CONSTRUCTION

### Tube

Synthetic and  
Natural Rubber Blend

### Reinforcement

High Strength Helix  
Steel & Cord Reinforcement

### Cover

EPDM Rubber

### Working Temperature

-25°C to +80°C (-13°F to +176°F)



| HOSE I.D. |     | WORKING PRESSURE | BURSTING PRESSURE | CUSTOMIZED LENGTH |
|-----------|-----|------------------|-------------------|-------------------|
| Inch      | NB  | Bar              | Bar               | Mtr               |
| 04        | 100 | 10-40            | 30-120            | Upto 20 meters    |
| 06        | 150 | 10-40            | 30-120            | Upto 20 meters    |
| 08        | 200 | 10-40            | 30-120            | Upto 20 meters    |
| 10        | 250 | 10-40            | 30-120            | Upto 11.8 meters  |
| 12        | 300 | 10-40            | 30-120            | Upto 11.8 meters  |
| 14        | 350 | 10-40            | 30-120            | Upto 11.8 meters  |
| 16        | 400 | 10-40            | 30-120            | Upto 11.8 meters  |



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT






FIRST OFF BUOY HOSE



MAINLINE HOSE



REDUCER HOSE

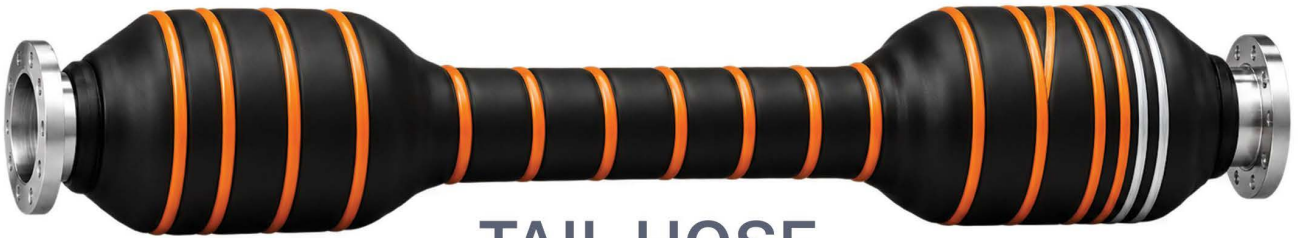

TAIL HOSE



TANKER RAIL HOSE



BUOYANCY CONTROL HOSE





**SUBMARINE HOSE**  
ONE REINFORCED END WITH LOCATION COLLARS



**SUBMARINE MAINLINE HOSE**  
WITH LOCATION COLLARS



**SUBMARINE HOSE**  
ONE REINFORCED END

# OCIMF HOSES



## SUBMARINE MAINLINE HOSE



## SUBMARINE TANKER RAIL HOSE





**Address:** Govt School, Unit 2, H.No:5-45/1/2  
Aditya Woodside Opp:, Doolapally Rd,  
Secunderabad, Telangana 500100

**Phone:** 099498 95178

**Mail:** sales@blsxltd.com,  
unmesh@blsxltd.com,  
shalvin@blsxltd.com



RELIABILITY



PERFORMANCE



QUALITY



COMMITMENT